



- ★ Super Low Gate Charge
- ★ 100% EAS Guaranteed
- ★ Green Device Available
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology



Product Summary

BVDSS	RDS(ON)	ID
60V	60mΩ	5.0A
-60V	100mΩ	-4.0A

Description

The XXW4612 is the high performance complementary N-ch and P-ch MOSFETs with high cell density, which provide excellent RDS(ON) and gate charge for most of the synchronous buck converter applications. The XXW4612 meet the RoHS and Green Product requirement 100% EAS guaranteed with full function reliability approved.

SOP8 Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Rating		Units
		N-Channel	P-Channel	
V _{DS}	Drain-Source Voltage	60	-60	V
V _{GS}	Gate-Source Voltage	±20	±20	V
I _D @T _A =25°C	Continuous Drain Current, V _{GS} @ 10V ¹	5.0	-4.0	A
I _D @T _A =70°C	Continuous Drain Current, V _{GS} @ 10V ¹	3.8	-3	A
I _{DM}	Pulsed Drain Current ²	9.6	-7.5	A
EAS	Single Pulse Avalanche Energy ³	15.5	20.3	mJ
I _{AS}	Avalanche Current	12.6	-16.6	A
P _D @T _A =25°C	Total Power Dissipation ⁴	1.5	1.5	W
T _{STG}	Storage Temperature Range	-55 to 150	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-Ambient ¹	---	62	°C/W
R _{θJC}	Thermal Resistance Junction-Case ¹	---	3	°C/W

N-Ch and P-Ch Fast Switching MOSFETs
N-Channel Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_{\text{D}}=250\mu\text{A}$	60	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_{\text{D}}=1\text{mA}$	---	0.063	---	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=4\text{A}$	---	60	75	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}$, $I_{\text{D}}=2\text{A}$	---	70	95	
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_{\text{D}}=250\mu\text{A}$	1.2	---	2.5	V
$\Delta V_{\text{GS}(\text{th})}$	$V_{\text{GS}(\text{th})}$ Temperature Coefficient		---	-5.24	---	$\text{mV}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=48\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	uA
		$V_{\text{DS}}=48\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=55^\circ\text{C}$	---	---	5	
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{\text{DS}}=5\text{V}$, $I_{\text{D}}=4\text{A}$	---	21	---	S
R_g	Gate Resistance	$V_{\text{DS}}=0\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	3.2	---	Ω
Q_g	Total Gate Charge (4.5V)	$V_{\text{DS}}=12\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=4\text{A}$	---	5.5	---	nC
Q_{gs}	Gate-Source Charge		---	1.8	---	
Q_{gd}	Gate-Drain Charge		---	2.4	---	
$T_{\text{d}(\text{on})}$	Turn-On Delay Time	$V_{\text{DD}}=12\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_g=3.3\Omega$, $I_{\text{D}}=4\text{A}$	---	6	---	ns
T_r	Rise Time		---	10	---	
$T_{\text{d}(\text{off})}$	Turn-Off Delay Time		---	15	---	
T_f	Fall Time		---	7	---	
C_{iss}	Input Capacitance	$V_{\text{DS}}=15\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	695	---	pF
C_{oss}	Output Capacitance		---	148	---	
C_{rss}	Reverse Transfer Capacitance		---	7	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,5}	$V_G=V_D=0\text{V}$, Force Current	---	---	5.0	A
I_{SM}	Pulsed Source Current ^{2,5}		---	---	9.6	A
V_{SD}	Diode Forward Voltage ²	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1.2	V

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{\text{DD}}=25\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=0.1\text{mH}$, $I_{\text{AS}}=5\text{A}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_{D} and I_{DM} , in real applications , should be limited by total power dissipation.

N-Ch and P-Ch Fast Switching MOSFETs

P-Channel Electrical Characteristics ($T_J=25\text{ }^\circ\text{C}$, unless otherwise noted)

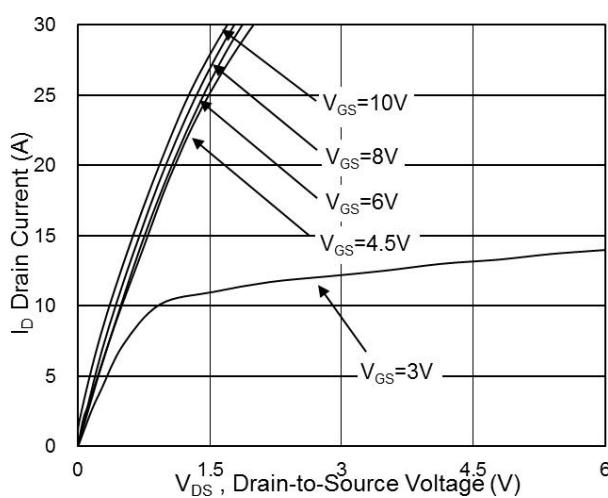
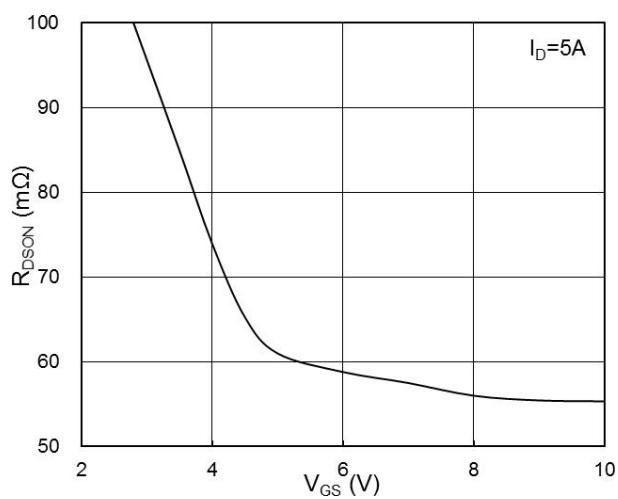
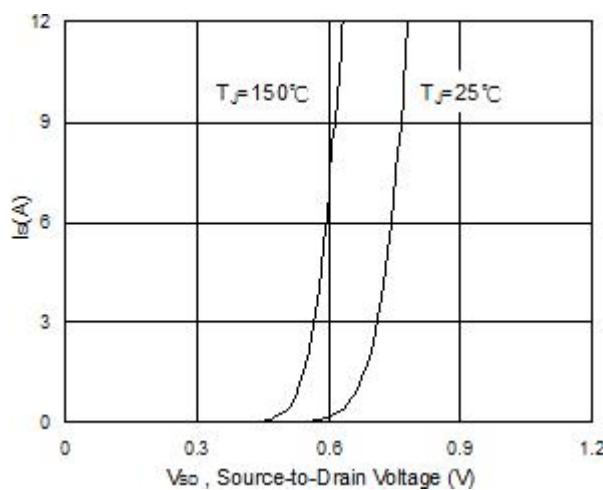
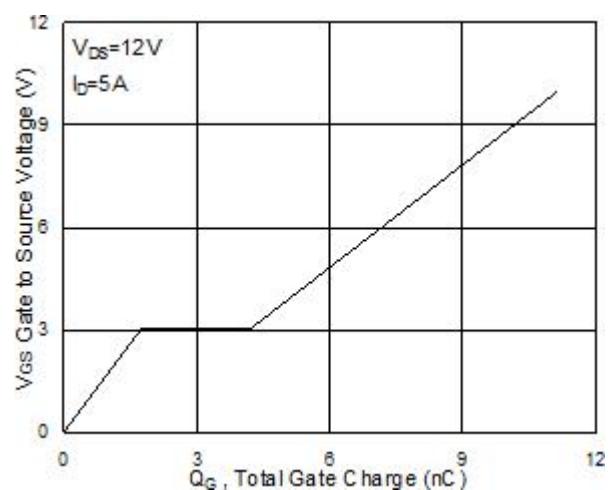
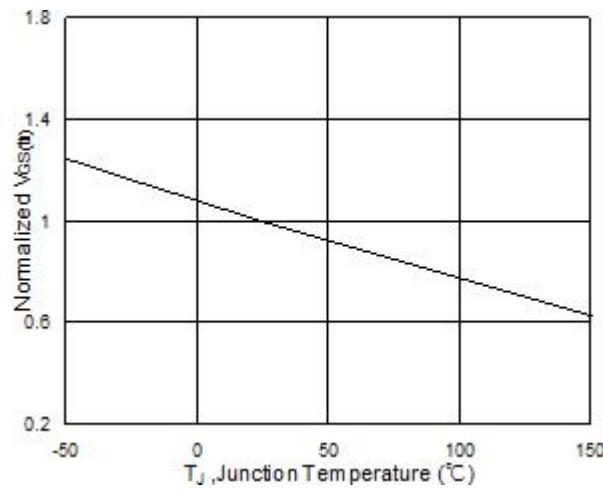
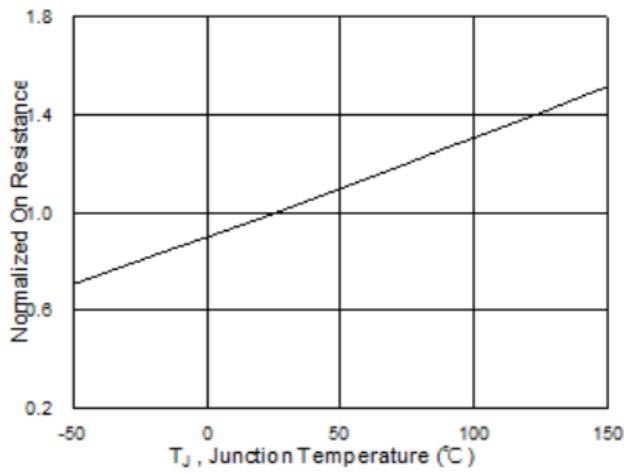
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}$, $I_D=-250\mu\text{A}$	-60	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to $25\text{ }^\circ\text{C}$, $I_D=-1\text{mA}$	---	-0.049	---	$\text{V}/\text{ }^\circ\text{C}$
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{GS}=-10\text{V}$, $I_D=-3\text{A}$	---	100	115	$\text{m}\Omega$
		$V_{GS}=-4.5\text{V}$, $I_D=-2\text{A}$	---	115	130	
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=-250\mu\text{A}$	-1.2	---	-2.5	V
$\Delta V_{GS(\text{th})}$	$V_{GS(\text{th})}$ Temperature Coefficient		---	4.56	---	$\text{mV}/\text{ }^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-48\text{V}$, $V_{GS}=0\text{V}$, $T_J=25\text{ }^\circ\text{C}$	---	---	1	uA
		$V_{DS}=-48\text{V}$, $V_{GS}=0\text{V}$, $T_J=55\text{ }^\circ\text{C}$	---	---	5	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20\text{V}$, $V_{DS}=0\text{V}$	---	---	$\pm 10_0$	nA
g_{fs}	Forward Transconductance	$V_{DS}=-5\text{V}$, $I_D=-3\text{A}$	---	5.8	---	S
R_g	Gate Resistance	$V_{DS}=0\text{V}$, $V_{GS}=0\text{V}$, $f=1\text{MHz}$	---	13.5	---	Ω
Q_g	Total Gate Charge (-4.5V)	$V_{DS}=-20\text{V}$, $V_{GS}=-4.5\text{V}$, $I_D=-3\text{A}$	---	5.9	---	nC
Q_{gs}	Gate-Source Charge		---	2.9	---	
Q_{gd}	Gate-Drain Charge		---	1.8	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-12\text{V}$, $V_{GS}=-10\text{V}$, $R_G=3.3\Omega$, $I_D=-3\text{A}$	---	10	---	ns
T_r	Rise Time		---	17	---	
$T_{d(off)}$	Turn-Off Delay Time		---	22	---	
T_f	Fall Time		---	21	---	
C_{iss}	Input Capacitance	$V_{DS}=-15\text{V}$, $V_{GS}=0\text{V}$, $f=1\text{MHz}$	---	715	---	pF
C_{oss}	Output Capacitance		---	51	---	
C_{rss}	Reverse Transfer Capacitance		---	34	---	

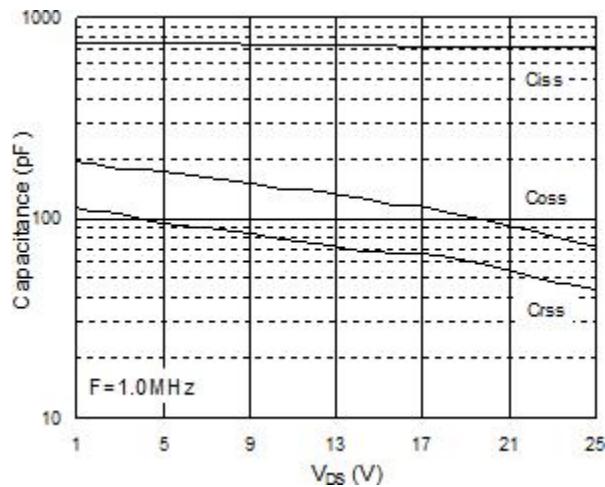
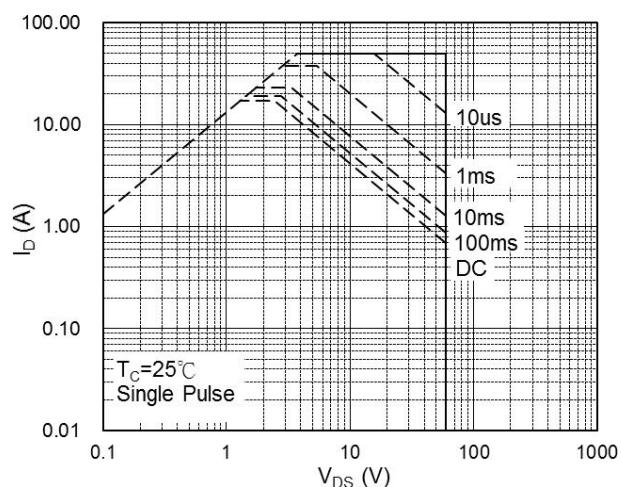
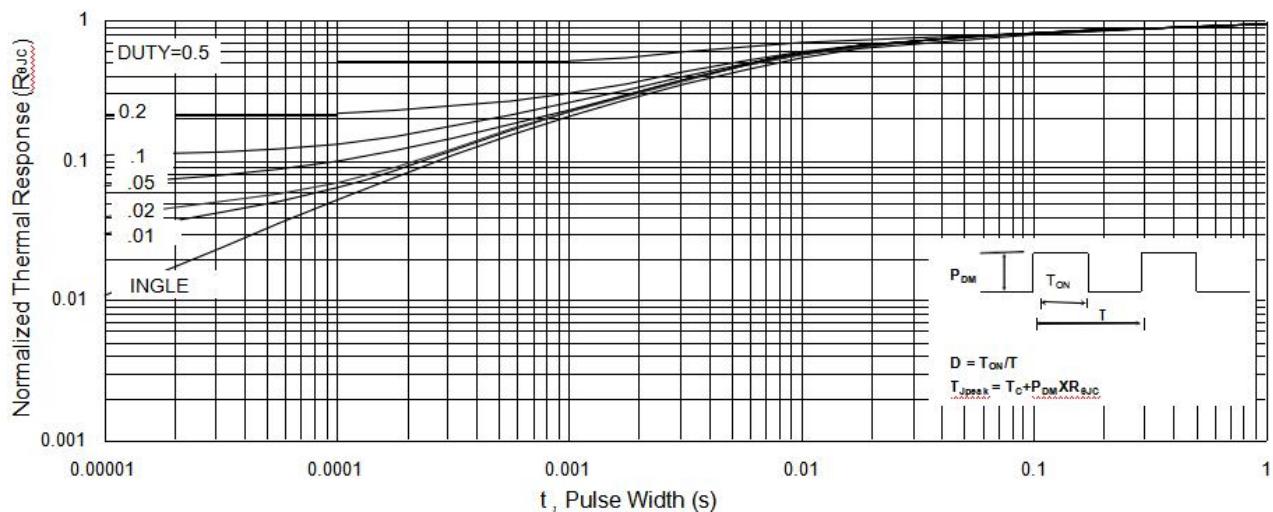
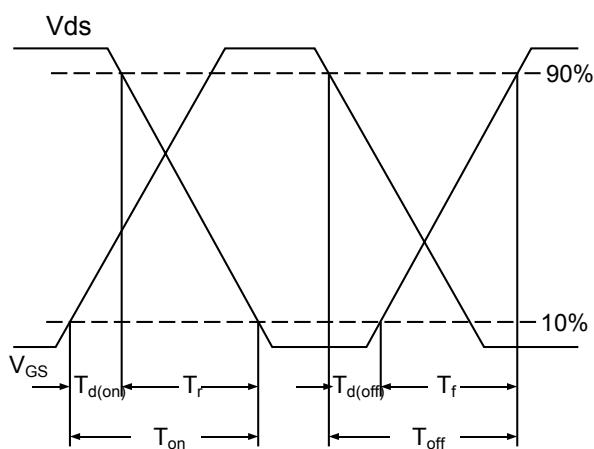
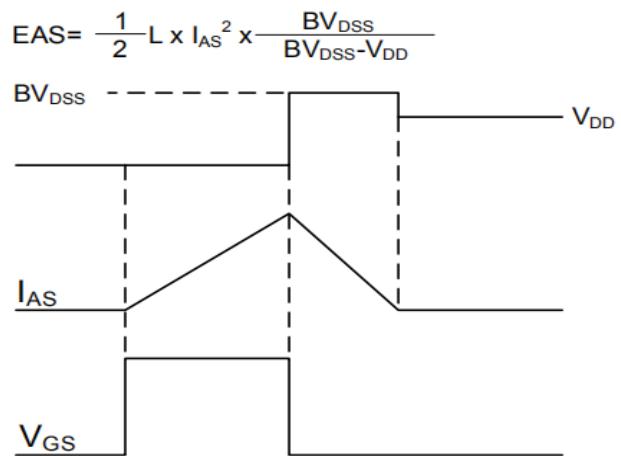
Diode Characteristics

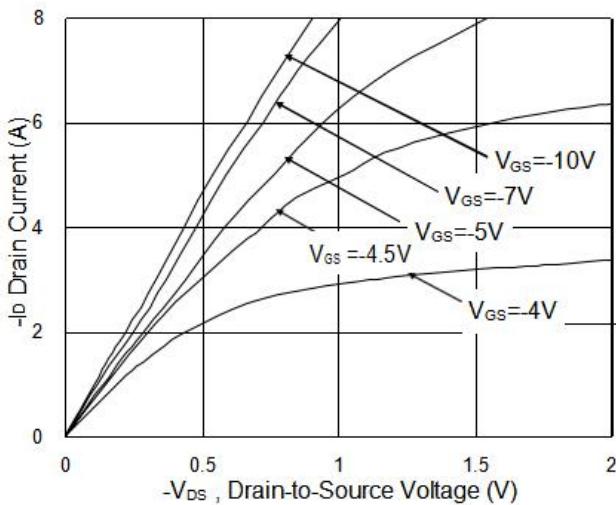
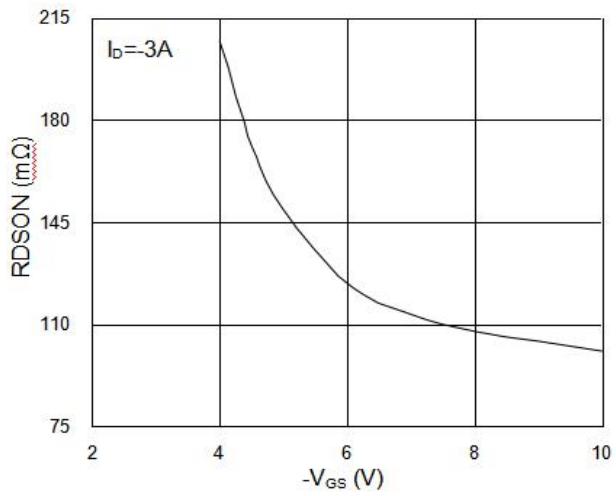
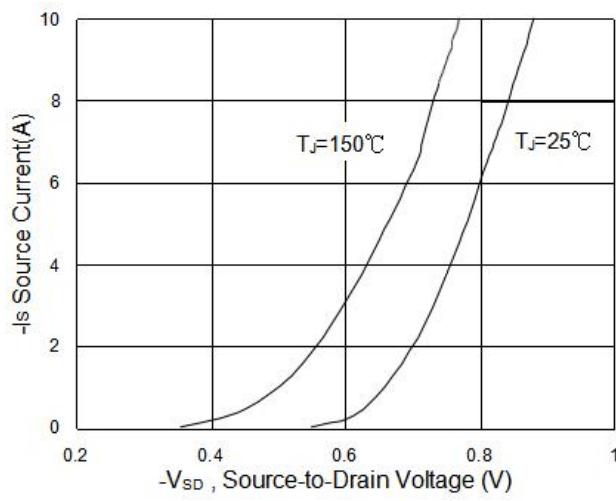
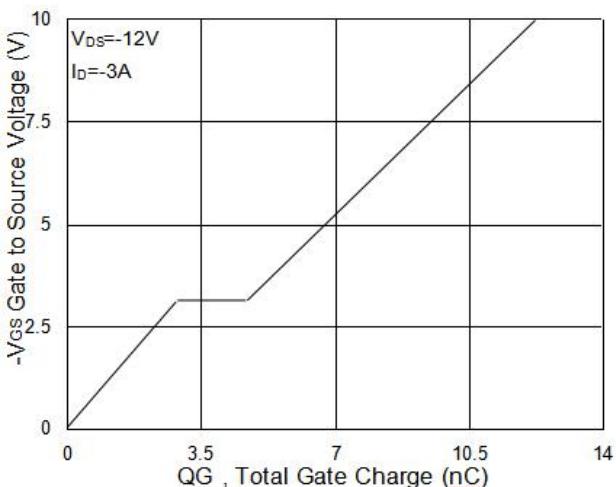
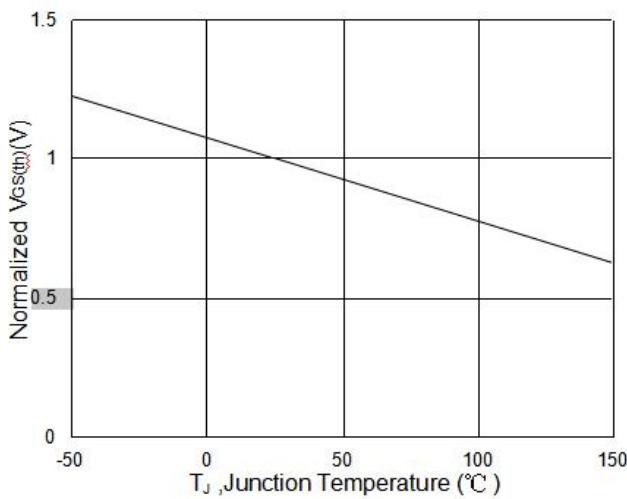
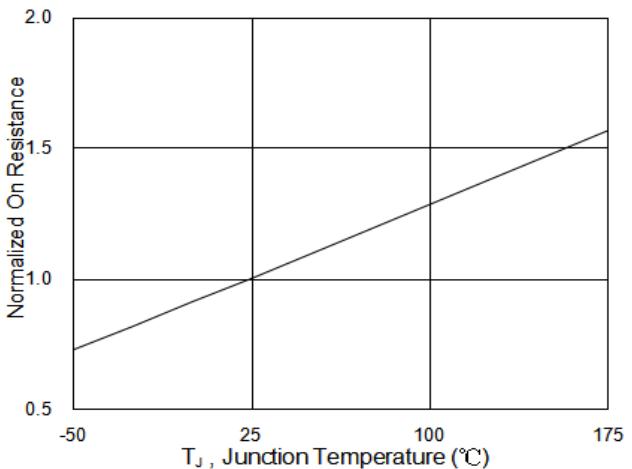
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,5}	$V_G=V_D=0\text{V}$, Force Current	---	---	-4.0	A
I_{SM}	Pulsed Source Current ^{2,5}		---	---	-7.5	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0\text{V}$, $I_s=-1\text{A}$, $T_J=25\text{ }^\circ\text{C}$	---	---	-1.2	V

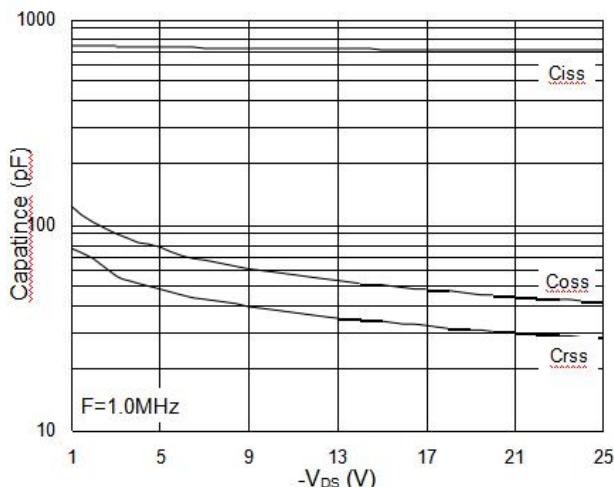
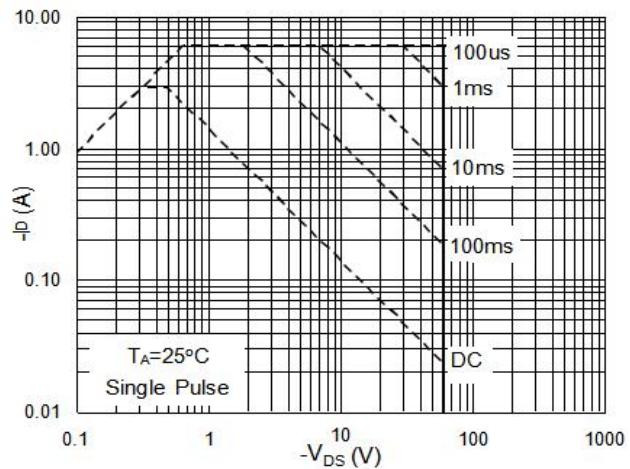
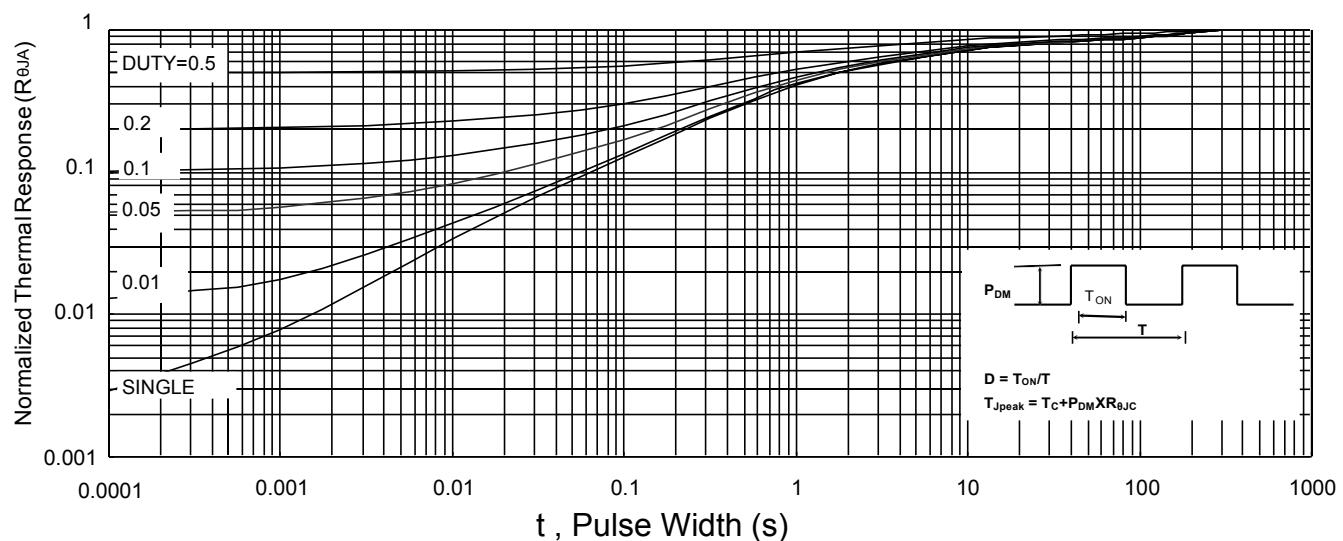
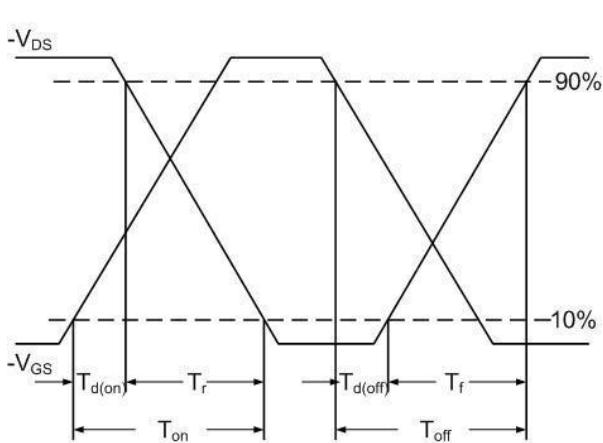
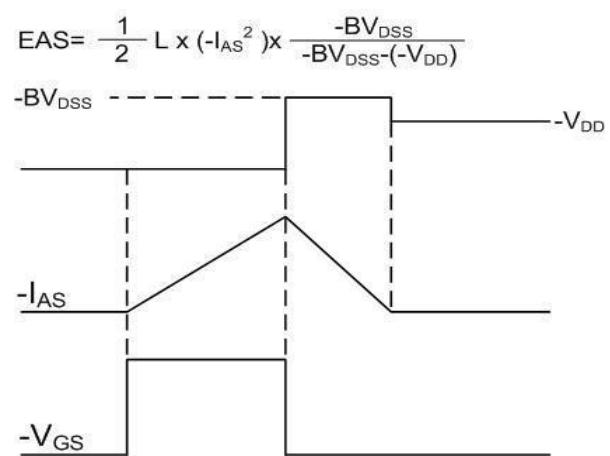
Note :

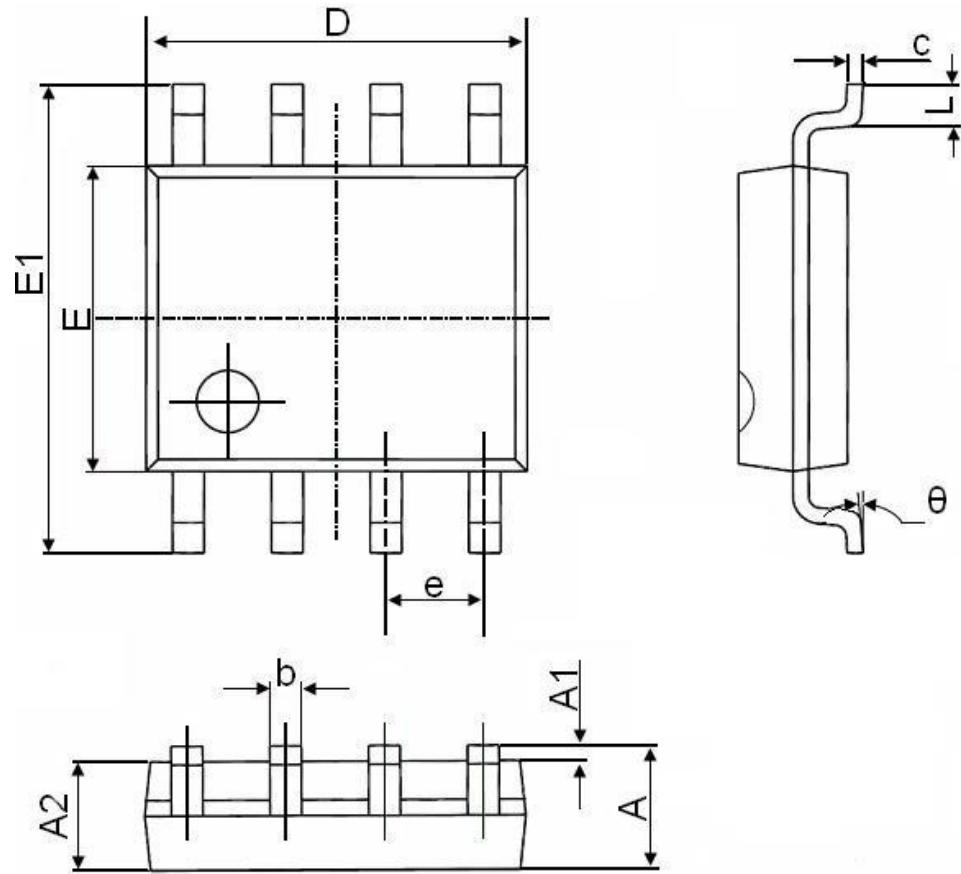
- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{DD}=-25\text{V}$, $V_{GS}=-10\text{V}$, $L=0.1\text{mH}$, $I_{AS}=-20.0\text{A}$
- 4.The power dissipation is limited by $150\text{ }^\circ\text{C}$ junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

N-Channel Typical Characteristics

Fig.1 Typical Output Characteristics

Fig.2 On-Resistance v.s Gate-Source

Fig.3 Forward Characteristics of Reverse

Fig.4 Gate-Charge Characteristics

Fig.5 Normalized $V_{GS(th)}$ v.s T_J

Fig.6 Normalized $R_{DS(on)}$ v.s T_J

N-Channel Typical Characteristics

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Waveform

P-Channel Typical Characteristics

Fig.1 Typical Output Characteristics

Fig.2 On-Resistance v.s Gate-Source

Fig.3 Forward Characteristics of Reverse

Fig.4 Gate-Charge Characteristics

Fig.5 Normalized $V_{GS(th)}$ v.s T_J

Fig.6 Normalized $R_{DS(on)}$ v.s T_J

N-Ch and P-Ch Fast Switching MOSFETs

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Waveform

SOP-8 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°