



- ★ Green Device Available
- ★ Super Low Gate Charge
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary

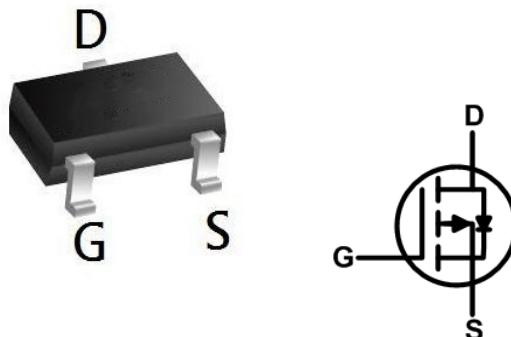
BVDSS	RDS(ON)	ID
-40V	34mΩ	-6 A

Description

The 6P04L is the high cell density trenched P-ch MOSFETs, which provides excellent RDS(ON) and efficiency for most of the small power switching and load switch applications.

The XR6P04 meet the RoHS and Green Product requirement with full function reliability approved.

SOT 23 -3L Pin Configurations



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	-40	V
V _{GS}	Gate-Source Voltage	±20	V
I _D @T _A =25°C	Continuous Drain Current	-6	A
I _D @T _A =70°C	Continuous Drain Current	-4.6	A
I _{DM}	Pulsed Drain Current ²	-25	A
P _D @T _A =25°C	Total Power Dissipation ³	2.0	W
P _D @T _A =70°C	Total Power Dissipation ³	1.5	W
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-Ambient ¹	---	65	°C/W
R _{θJA}	Thermal Resistance Junction-Ambient ¹ (t ≤ 10s)	---	55	°C/W

P-Ch 40V Fast Switching MOSFETs
Electrical Characteristics ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

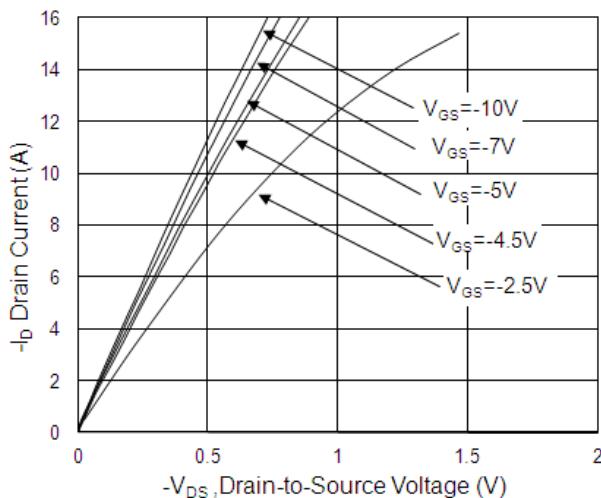
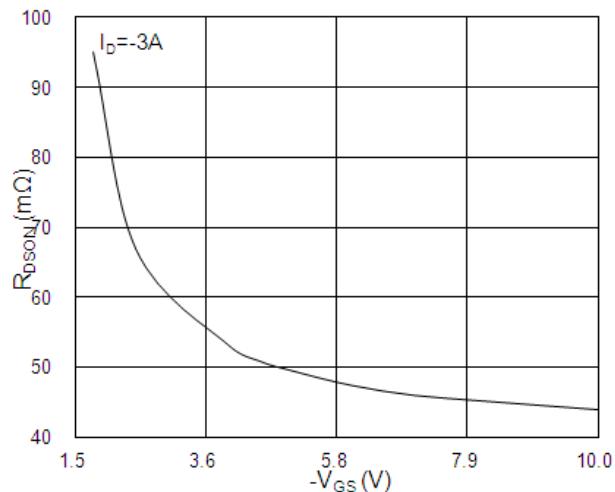
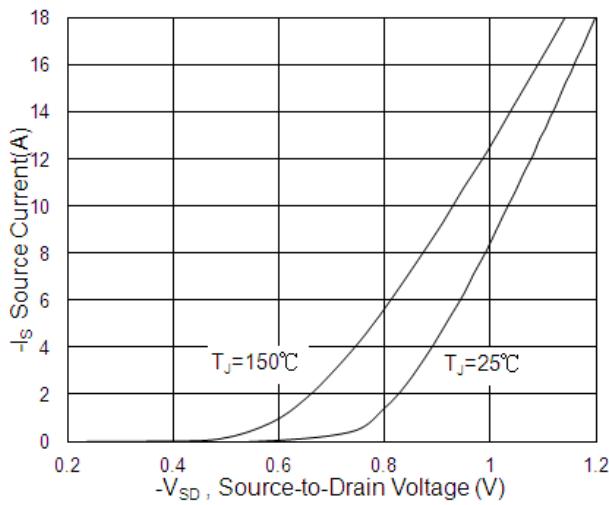
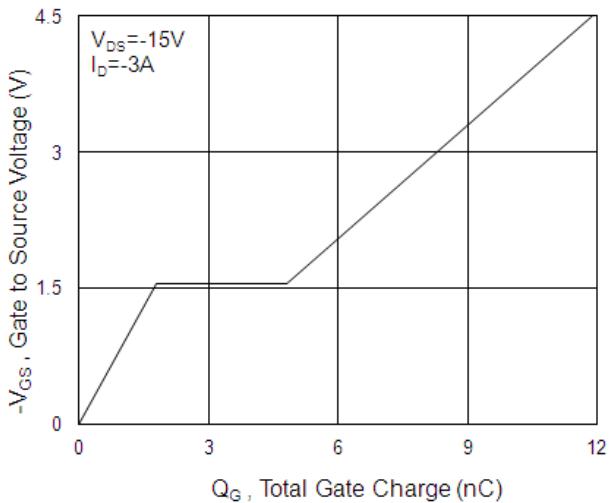
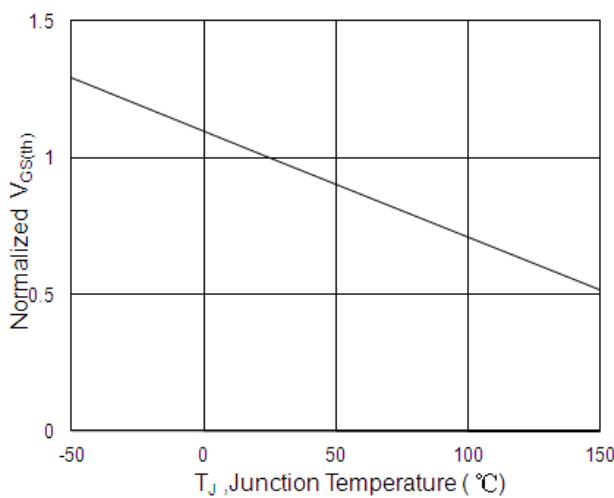
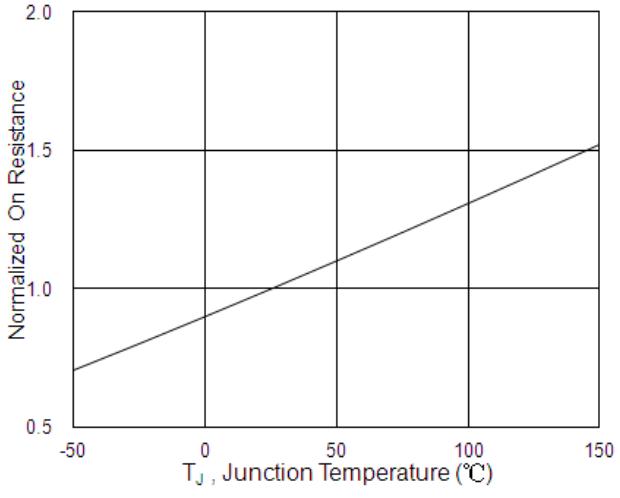
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=-250\mu\text{A}$	-40	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=-1\text{mA}$	---	-0.014	---	$\text{V}/^{\circ}\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=-10\text{V}$, $I_D=-3\text{A}$	---	34	40	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}$, $I_D=-3\text{A}$	---	45	60	
		$V_{\text{GS}}=-2.5\text{V}$, $I_D=-2\text{A}$	---	---	---	
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_D=-250\mu\text{A}$	-1.0	---	-2.5	V
$\Delta V_{\text{GS}(\text{th})}$	$V_{\text{GS}(\text{th})}$ Temperature Coefficient		---	2.6	---	$\text{mV}/^{\circ}\text{C}$
I_{DS}	Drain-Source Leakage Current	$V_{\text{DS}}=-24\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^{\circ}\text{C}$	---	---	-1	uA
		$V_{\text{DS}}=-24\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=55^{\circ}\text{C}$	---	---	-5	
I_{GS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 12\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{\text{DS}}=-5\text{V}$, $I_D=-3\text{A}$	---	5.6	---	S
Q_g	Total Gate Charge (-4.5V)	$V_{\text{DS}}=-15\text{V}$, $V_{\text{GS}}=-4.5\text{V}$, $I_D=-3\text{A}$	---	11.9	---	nC
Q_{gs}	Gate-Source Charge		---	1.8	---	
Q_{gd}	Gate-Drain Charge		---	3	---	
$T_{\text{d}(\text{on})}$	Turn-On Delay Time	$V_{\text{DD}}=-15\text{V}$, $V_{\text{GS}}=-4.5\text{V}$, $R_G=3.3\Omega$, $I_D=-3\text{A}$	---	6.6	---	ns
T_r	Rise Time		---	27.8	---	
$T_{\text{d}(\text{off})}$	Turn-Off Delay Time		---	46.2	---	
T_f	Fall Time		---	20.6	---	
C_{iss}	Input Capacitance	$V_{\text{DS}}=-15\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	920	---	pF
C_{oss}	Output Capacitance		---	73	---	
C_{rss}	Reverse Transfer Capacitance		---	71	---	

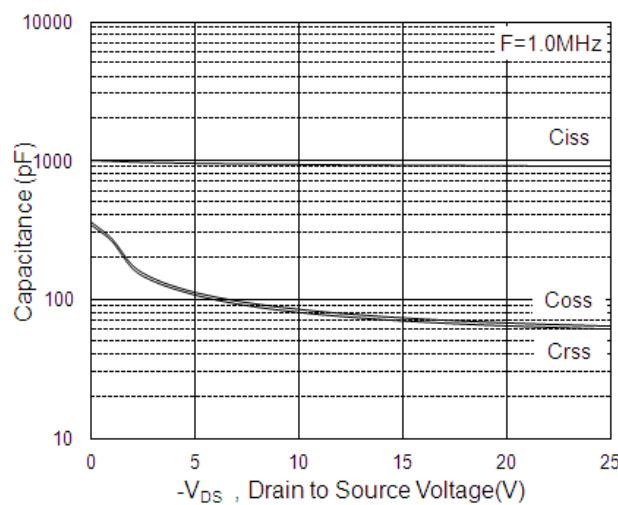
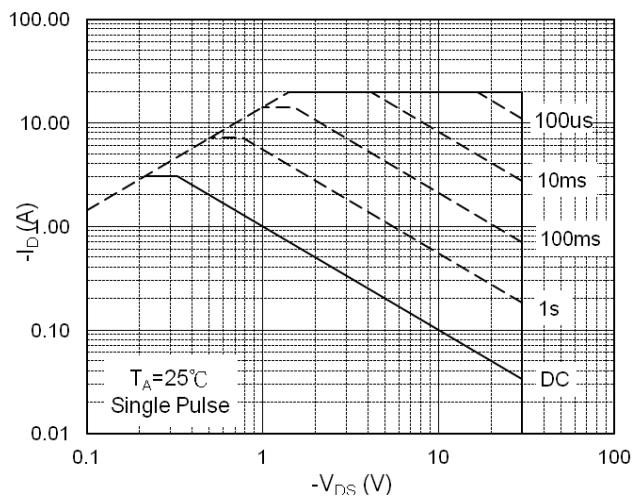
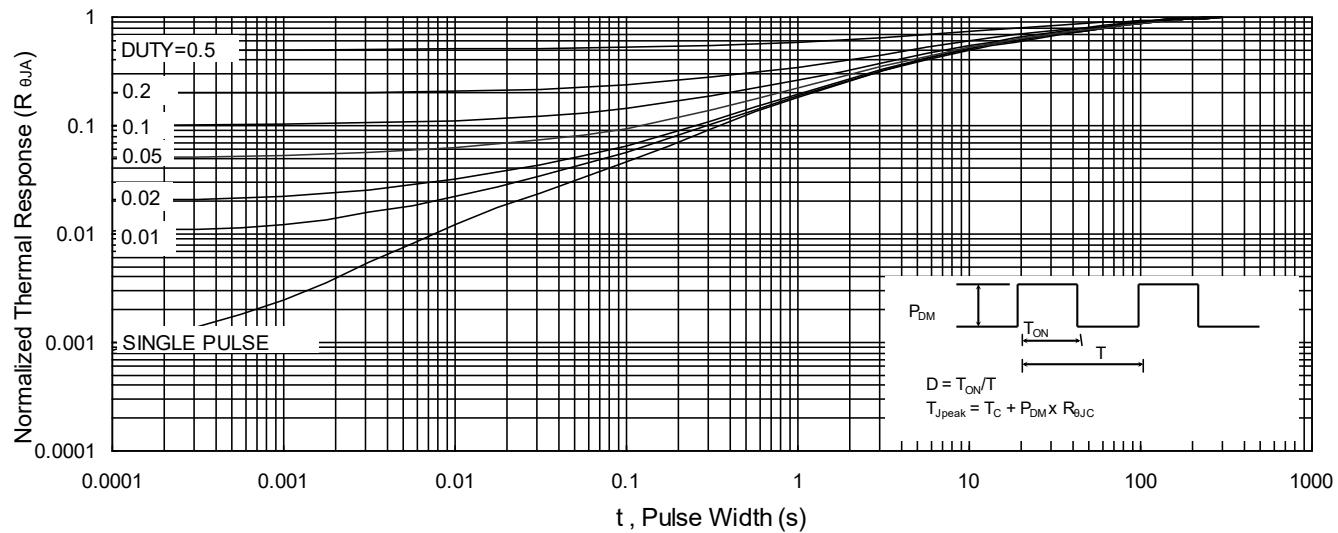
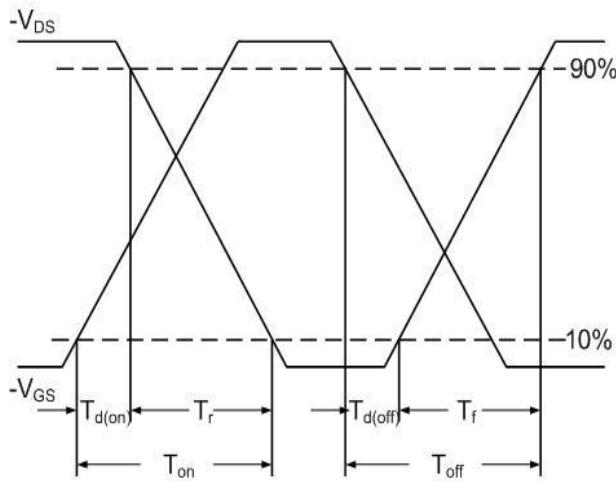
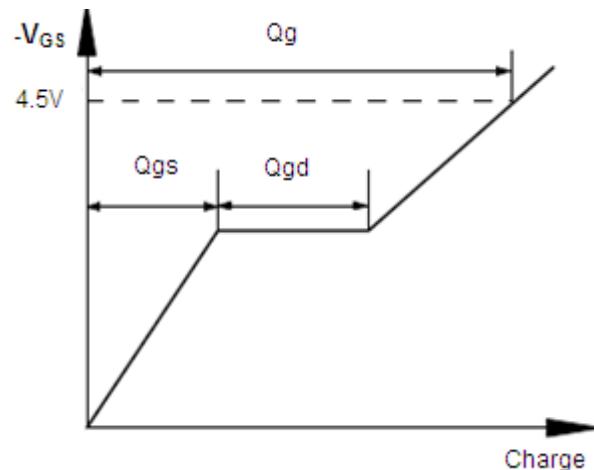
Diode Characteristics

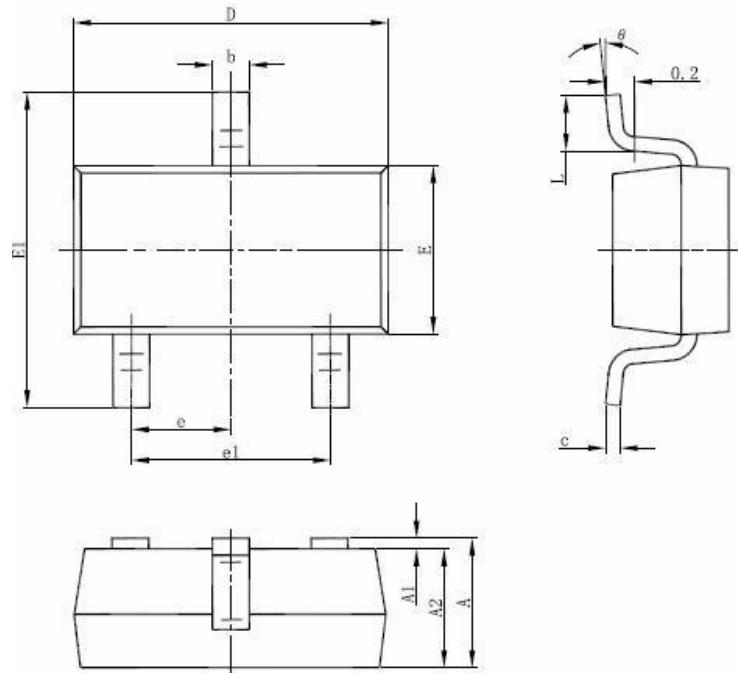
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,4}	$V_G=V_D=0\text{V}$, Force Current	---	---	-6.0	A
V_{SD}	Diode Forward Voltage ²	$V_{\text{GS}}=0\text{V}$, $I_s=-1\text{A}$, $T_J=25^{\circ}\text{C}$	---	---	-1.2	V

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The power dissipation is limited by 150°C junction temperature
- 4.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

P-Ch 40V Fast Switching MOSFETs
Typical Characteristics

Fig.1 Typical Output Characteristics

Fig.2 On-Resistance vs. G-S Voltage

Fig.3 Forward Characteristics Of Reverse

Fig.4 Gate-Charge Characteristics

Fig.5 Normalized $V_{GS(th)}$ vs. T_J

Fig.6 Normalized R_{DSON} vs. T_J

P-Ch 40V Fast Switching MOSFETs

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Gate Charge Waveform

Package Mechanical Data-SOT-23-3L


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°